


PROFITAP

C1-1G-RG2 Re-Generation 10/100/1000 Tap

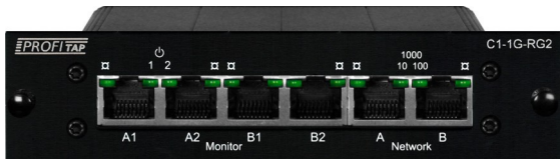

CUSTOMER SUPPORT INFORMATION

To order or for a technical information support:

Phone: +33 3 88 10 18 30 or

Fax: +33 3 88 10 18 35

Mail order: COMCRAFT

17A, rue des Frères Lumière

67201 Eckbolsheim - France

Website: www.profitap.com

E-mail: info@profitap.com

PROFITAP® is a brand of **COMCRAFT, Inc.**

Our engineers have been developing innovative **LAN/WAN and Datacom Test Equipment** for over **25 years**.

Commitment to **Quality** and Customer **Satisfaction** is paramount in everything we do to achieve our first and only mission : Help our customers to raise their networks to **maximum efficiency and security** through our non-intrusive tools.

The confidence placed in our products is the reward for many years listening to customer needs and expectations, improving technology, service and support.


Our products have been recognized worldwide and all of them serve the benefit of our customers.

COMCRAFT, Inc. was founded in 1984 and headquartered in Strasbourg - France.

This Package includes :

- ◆ 1x C1-1G-RG2 Main Unit
- ◆ 1x Power adapter 12V-0,5A

Index	pages
1. General Information	4
2. Functional Description	4
2.1. Interface connectors	4
2.2. Activity/Link	5
2.3. Speed LEDs	5
2.4. Link redundancy	5
2.5. Power	5
2.6. Power Failure	5
2.7. Fast Failover (1G)	5
3. Installation	6
4. Additional information	7

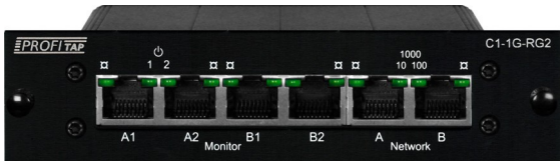

C1R-1G-RG2

1. General Information.

The C1-1G-RG2 Re-generation Tap allows monitoring of one single network link by 2 devices simultaneously. It works in any IDS, Protocol or other half/full-duplex, monitoring application.

The C1-1G-RG2 tap avoids downtime in your 10/100/1000 Base-T networks. Once in place it allows you to monitor full and half duplex communication and move test equipment without breaking the circuit. It mirrors any packet size, bad CRC, VLAN traffic, sees both ends of full-duplex links.

It is a single port 10/100/1000 Base-T Tap for half/full duplex Ethernet networks. The redundant power feature makes it ideal for security applications.

The C1-1G-RG2 tap has no IP address and is invisible to the network. It is fault tolerant, bypasses data on power failure, the monitor ports are none-intrusive to the network.

2. Functional description

2.1 Interface connectors

The C1-1G-RG2 Tap has 6 RJ45 ports. Network ports A and B are connected to the network, Monitor ports A1, A2, B1 and B2 are connected to the analyzers.

2.2 Activity/Link

Four LEDs indicate Activity and Link for each of the four ports. Link LED lights up when a link is detected at the port. Activity LED blinks when a signal is detected on one of the ports.

2.3 Speed LEDs

Two LEDs indicate mutual speed at 10/100/1000Mbps.

2.4 Link redundancy

The disconnection of one network port will disconnect all ports until the next connection of the two network ports.

2.5 Power

The C1-1G-RG2 tap is redundant powered from the back. The external power can be chained as each power has two sockets. Using redundant powering guarantees a maximum up-time off the monitor ports. Two LEDs show the presence of power.

2.6 Power Failure


The uninterrupted link in the network guarantees permanent network connectivity, also when power fails. No data is passed to the TAP ports at power failure.

2.7 Fast Failover (1G)

When a power transition event occurs, the network devices renegotiate the link. This operation can take up to 5 seconds depending on network configuration and can cause a network topology reconfiguration. Fast Failover feature helps to reduce this time by keeping the link up without renegotiation and data loss during the power change event.

With Fast Failover, the network's path unavailability is between 30 and 300ms.

3. Installation

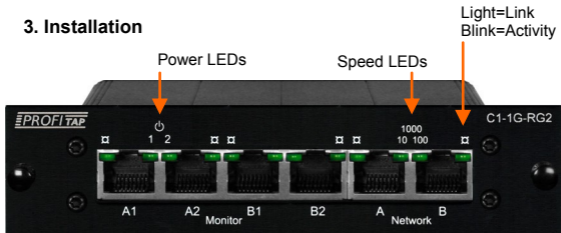

1. Power both network devices, **do NOT** power the TAP

Note: A powered TAP will always correct a wrong cable setup.

Connect the network using category 5e UTP cables.

a. If the two (2) network devices are of DTE and DCE type, use two (2) straight cables.

b. If the two (2) network devices are of the same type (2*DTE or 2*DCE) use one straight and one cross-over cable.

* The connected network devices show LINK (or Activity). If there is no LINK, change one of the cables by an opposite type.

2. When two devices are connected on the network ports, the two speed LEDs blink simultaneously to indicate the negotiation of the highest mutual Speed. When the connection is establish, the Speed LEDs indicates the network speed:

- ◆ the left LED light for a 10Mb connection.
- ◆ the right LED light for a 100Mb connection.
- ◆ both LEDs light for a Gb connection.

If no mutual speed is detected, the two LEDs blink alternatively.

* Network activity is shown on the Activity LEDs of NetworkA and NetworkB.

3. Connect the Monitor Ports to the analyzers using straight or cross-over CAT5e cables.

The Monitor Ports are at the speed of the network ports.

The Monitor Ports Link LEDs light when link is found.

* Activity received into NetworkA and NetworkB will be mirrored on the respective Monitor Ports and blink the ACTIVITY LEDs.

The maximum distance between any of the connected devices is 100mtr.

4. Additional information.

Mechanical Specifications:

Enclosure: Aluminium
Black Front panel

Powered by external adapter: 90-240VAC / 12V-0,5A

Power consumption for one unit: 6W

LEDs: 6x Link/Activity, 2x Network speed , 2x Power

Connectors: 6x RJ45, 8 pin, gold plated

Dimensions:

C1R-1G-RG2 :11.3x16x3 cm (WxDxH) Front Panel :14.2x3 cm

Weight : 300 gr

Environmental Specifications:

Operating Temperature: 0°C to 50°C

Storage Temperature: -22°C to 70°C

Humidity: 10 to 90%, non-condensing

Certifications: RoHS, CE, FCC class A and IEEE 802.3

Disclaimer

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties with respect to the contents hereof and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. The manufacturer reserves the right to revise this publication and to make changes in the content hereof without obligation of the manufacturer to notify any person of such revision or changes.

Warranty and Liability

Comcraft warrants that this product is free from defects in material and workmanship at time of shipment. The warranty period is 2 years from the date of purchase. The standard 2 year warranty period may be extended at the time of order. Comcraft assumes no liability for products that have been subjected to abuse, modification, misuse, or if the model or serial number has been altered, tampered with, defaced or removed. Comcraft is not liable under any contract, negligence, strict liability or other legal or equitable theory for any loss of use of the product, inconvenience or damages of any character, whether direct, special, incidental or consequential (including, but not limited to, damages for loss of goodwill, loss of revenue or profit, work stoppage or malfunction)

Copyright

This publication, including all photographs and illustrations, is protected under international copyright laws, with all rights reserved. Neither this manual, nor any of the material contained herein, may be reproduced without written consent of the author

Trademarks

The trademarks mentioned in this manual are the sole property of their owners.

Rev 1.0



COMCRAFT
17A, rue des Frères Lumière
67201 Eckbolsheim
France



+33 3 88 10 18 30



+33 3 88 10 18 35

www.profitap.com

